

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

# (12) UK Patent Application (19) GB (11) 2 101 077 A

(21) Application No 8214070

(22) Date of filing  
14 May 1982

(30) Priority data  
(31) 8103846

(32) 18 Jun 1981

(33) Sweden (SE)

(43) Application published  
12 Jan 1983

(51) INT CL<sup>3</sup> E02F 9/26

(52) Domestic classification  
B8H 301 326 403 430  
431 551 558 FD  
U1S 1762 B8H

(56) Documents cited

GB 1344898  
GB 1139542  
WOA 8102904

(58) Field of search  
B8H

(71) Applicants  
Rune Nilsson  
Blockvägen 25  
S-813 00  
Hofors  
Sweden

Jiri Formanek

Borgvägen 18  
S-813 00

Hofors  
Sweden

(72) Inventors

Jiri Formanek  
Rune Nilsson

(74) Agents

Barlow Gillett and  
Percival  
94 Market Street  
Manchester M1 1PJ

## (54) Checking digging depth

(57) A device is provided for checking the depth reached by operation of a digging machine including a digging implement (11) arranged on an arm (8) pivotably supported relative to the machine. The device comprises a fluid-filled conduit (13) associated with the arm (8) and extending between a location (14) thereon and a location (15) on the machine sepa-

rated from the arm (8). Said conduit is associated with a pressure sensor (17) for delivering information corresponding to the height (VP) of the fluid column between said locations. On the arm (8), there is provided, in addition to the first mentioned sensor (17), a second sensor (18) adapted to deliver information as the inclination of the arm (8). In this way, the pressure sensor (17) may be provided at a known arbitrary location (14) on the arm 8. The known distance S is used in conjunction with the inclination of the arm (8) to compute the vertical distance H2, to which may be added the known vertical distance H1 (the digging implement (11) being set with its back (22) level), so that the depth H3 below ground level M may be determined and then shown on a depth indicator (21). When working below ground level (M) a reference level may be established by use of a rotating laser (Fig. 2, not shown).


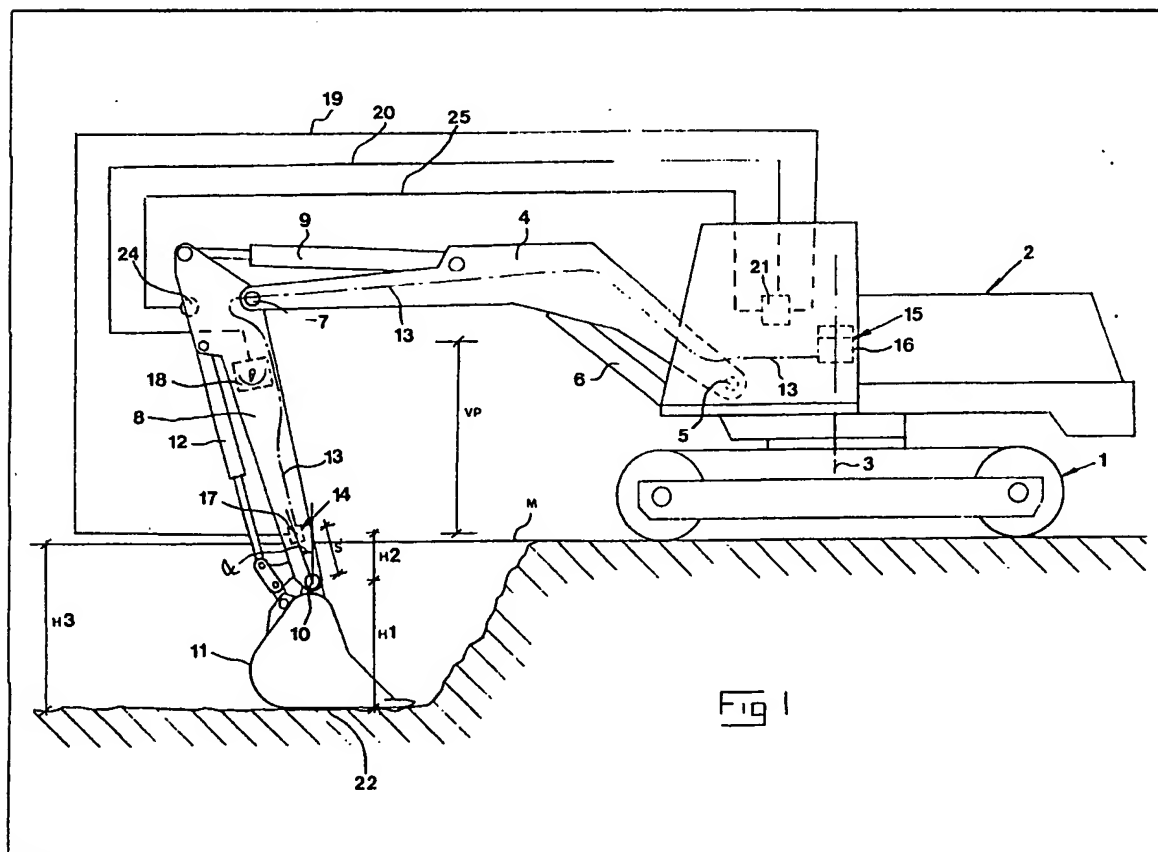


Fig 1

GB 2 101 077 A

2101077

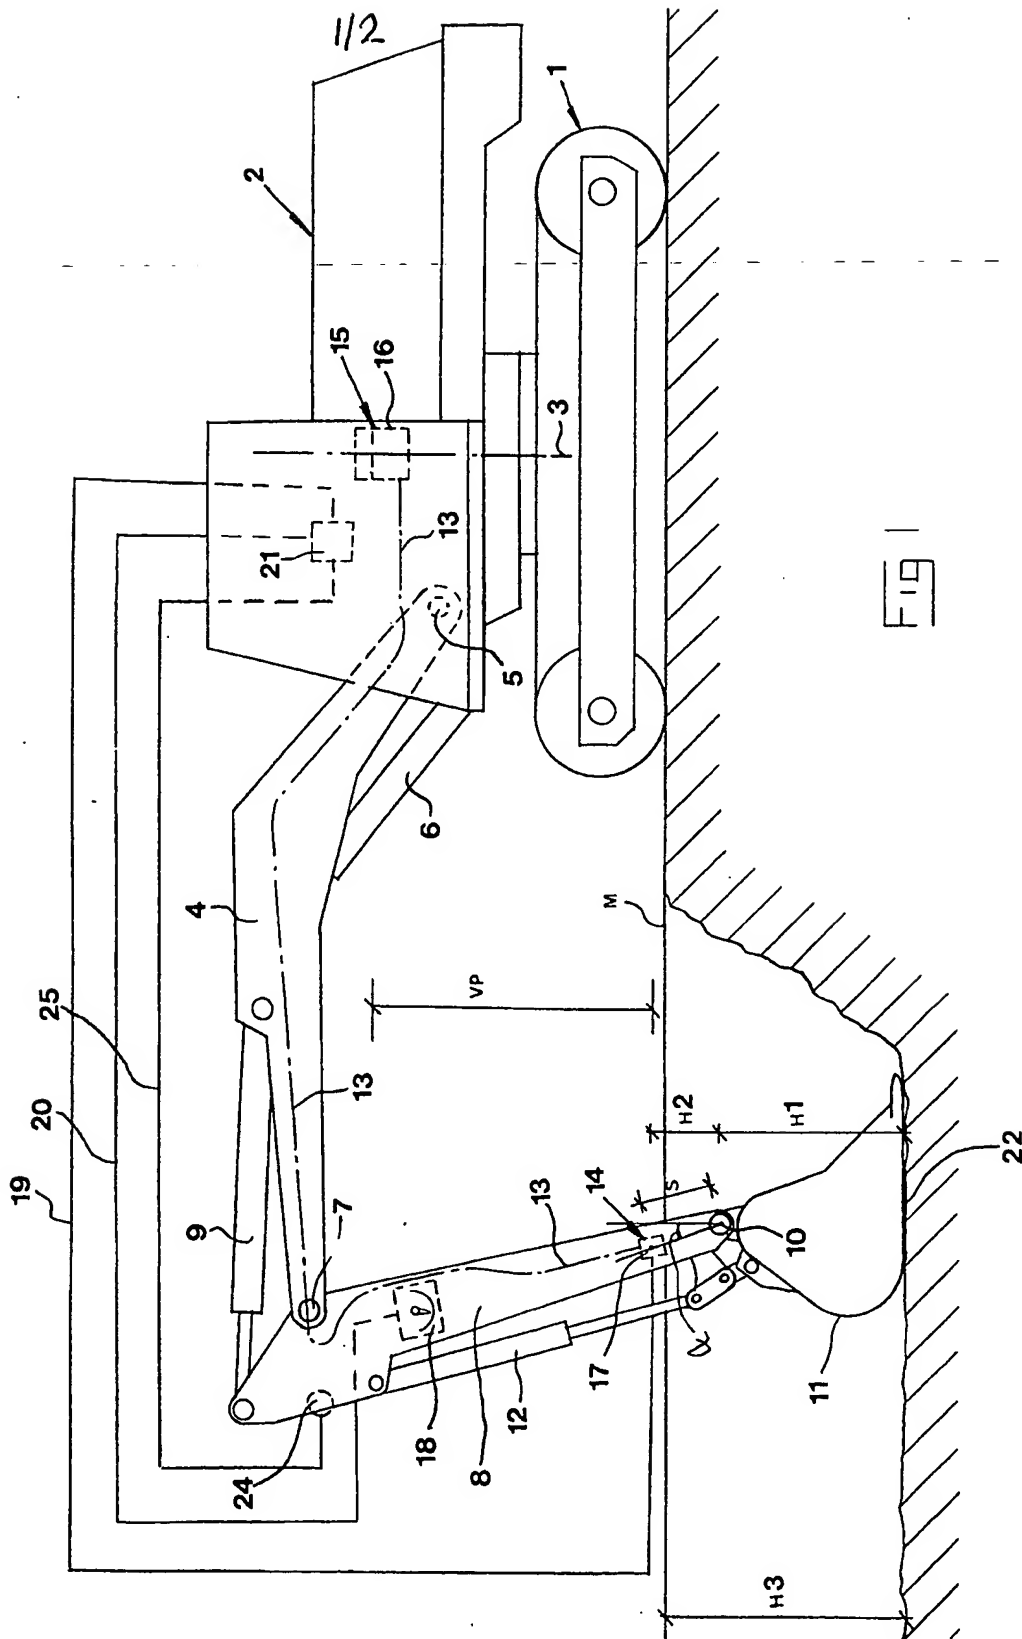

2101077

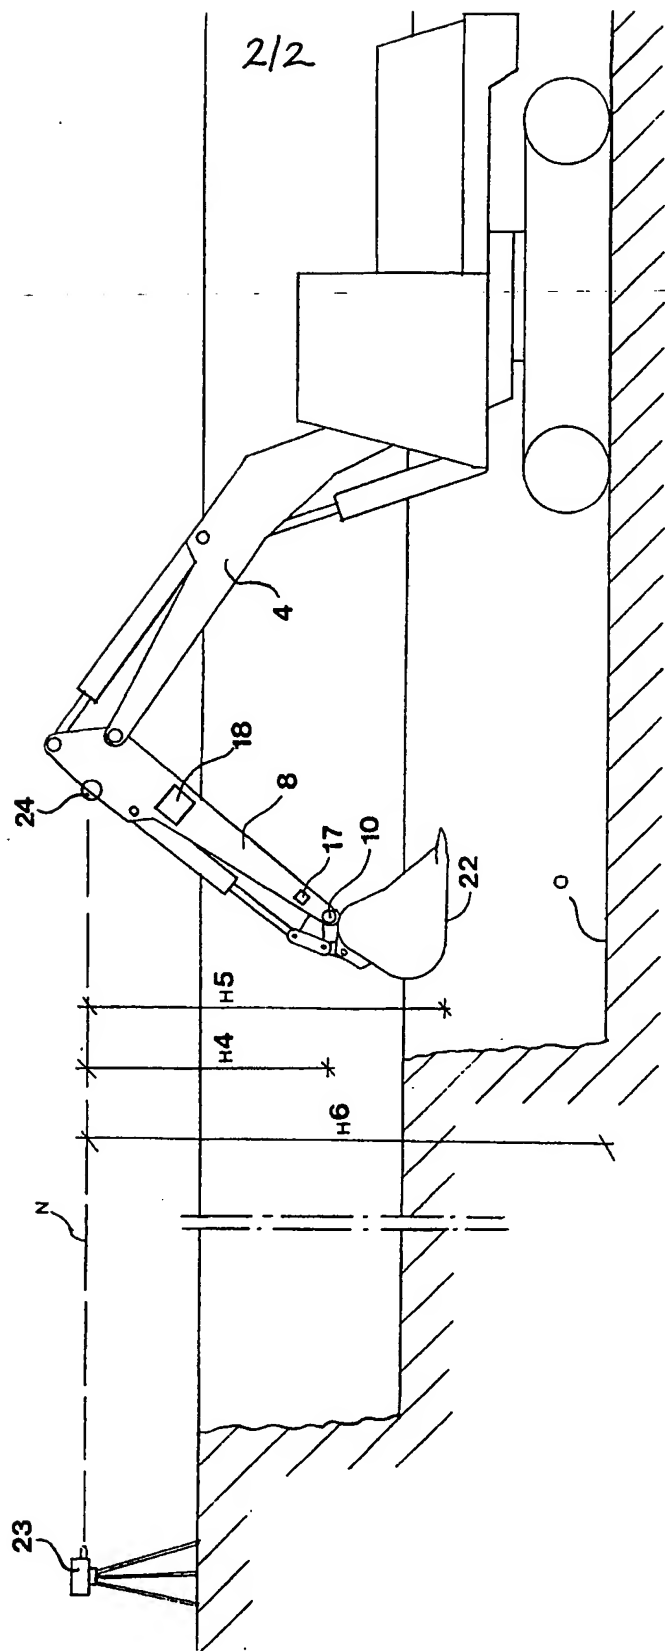


FIG 2

## SPECIFICATION

### A device for checking the depth reached by a digging operation

5 A device for checking the depth reached by operation of a digging machine including a digging implement arranged on an arm pivotably supported relative to the machine is  
10 previously known by the Swedish patent 339 443. A fluid-filled conduit extends along the arm and is at the digging bucket connected to a body having a volume varying under the influence of the pressure of the fluid. The  
15 other end of the conduit is located at a location on the machine spaced from the arm and connected to a level meter. At least some sections of the conduit must be flexible. Upon bending of such flexible conduit sections, the  
20 fluid volume in the conduit will change considerably, thereby causing, in connection with such a level measuring contemplated in the patent, an unsatisfactory accuracy as to the measuring result. The fluid volume and hence  
25 measuring result varies also with temperature changes. An additional problem with this prior device is that the body disposed on the digging bucket is very exposed to damages and requires protective measures reducing the  
30 capacity of the bucket. In addition, it is desirable to be able to change bucket easily and rapidly. This makes it unsuitable to provide the body on the bucket.

According to a development of this prior  
35 device, it has been suggested to replace said body and level meter by a pressure sensor delivering an output signal representative for the height of the fluid column so that influence of the measuring errors can be reduced,  
40 said sensor being located so that it always remains on the arm, more specifically in the vicinity of a hinge between the arm and bucket, so as to allow easy change of bucket. The development within the digging machine  
45 field has lately tended towards use of narrower and narrower buckets. For this purpose, also the arm and hinge must have a small lateral extent and it has turned out to be difficult to arrange the pressure sensor in the  
50 vicinity of this hinge.

The use of laser light has recently been adopted in an expanding extent on building sites and the like so as to define reference levels. It would be desirable to provide a  
55 device, by means of which the operator of the digging machine easily may "read" such reference levels without having to turn to separate indicator pins or other more or less primitive accessories.

### BRIEF DISCLOSURE OF THE INVENTION

Starting from a device according to the preamble of claim 1, the object of this invention is accordingly to enable elimination of the  
65 above problems and enable simple and convenient

reading of reference levels established by laser or other facilities.

In accordance with the present invention, this object is obtained by the characteristic feature of claim 1. Thanks to this inclination sensor, freedom is obtained to locate the sensor the height of the fluid column at an arbitrary location on the arm; the information obtained from the two sensors is sufficient for  
70 calculation of e.g. the level of the back of the digging implement relative to a predetermined reference level. Furthermore, a detector sensitive for laser light or other rays or wave motions defining a reference plane, level or  
75 line can be arranged at an arbitrary location on the arm. As soon as the detector has been located in said reference plane etc. the level of e.g. the back of the digging implement can be easily calculated from the output signals  
80 from the inclination sensor.

Efforts have been made to enable, at digging machines having two pivoted arms, an outreach boom and a downreach boom, measurement of the digging depths by providing  
90 inclination sensors on the outreach boom as well as the downreach boom without using measurement of a fluid column. However, this embodiment based on pure inclination measurement gives an unsatisfactory accuracy  
95 since a relatively small measurement error concerning the inclination of the outreach boom involves a great error due to the large length of the outreach boom. Furthermore, a condition in this embodiment is that the pivotal connection of the outreach boom to a  
100 machine housing rotatably movable relative to a body coincides with the axis of rotation since rotation of the machine housing otherwise would give a measurement error when  
105 the machine is not standing on horizontal ground. Finally, it is not possible in this embodiment to change downreach boom or use an outreach boom having a variable effective length without having the possibility of  
110 extensive modification or correction of the measuring system.

### BRIEF DISCLOSURE OF THE DRAWINGS

With reference to the appended drawings a  
115 more specific disclosure of an embodiment according to the invention will follow hereinbelow.

In the drawings:

Figures 1 and 2 are diagrammatical views  
120 illustrating a digging machine during operation in two different situations.

### DETAILED DISCLOSURE OF A PREFERRED EMBODIMENT

125 The digging machine illustrated in the drawings is of a classic type and has an under body 1 provided with vehicle tracks. On the under body, there is mounted a digging machine housing 2 rotatable relative to the under  
130 body about a generally vertical axis 3. An

outrreach boom 4 is connected to the machine housing 2 via a hinge 5 and pivotable about said hinge by e.g. a piston cylinder mechanism 6. At its outer end, the outreach boom is via a hinge 7 connected to an arm 8, also called downreach boom. A piston cylinder mechanism 9 pivots the boom 4 and the arm 8 relative to each other. At the outer end of the arm 8, a digging implement 11 in the form of a bucket is connected via a hinge 10. A piston cylinder mechanism 12 serves to rotate the bucket about hinge 10.

To check the depth of the digging operation, there is a device comprising a diagrammatically indicated fluid-filled conduit 13 associated to arm 8 and boom 4, said conduit extending between a location 14 on arm 8 and a location 15 on machine housing 2. Said conduit may in practice include highly flexible sections at the transitions between machine housing 2 and boom 4 and between the boom and arm 8.

The location 15 on machine housing 2 is constituted by a fluid receptacle 16 having a horizontal sectional area considerably exceeding the cross section of conduit 13, whereby it is obtained that the changes of the volume of conduit 13 occurring due to flexing of the flexible conduit sections and temperature variations will have a very small and hence neglectable influence on the fluid column VP constituted by conduit 13 and extending between locations 14 and 15.

A sensor 17 for delivering an information corresponding to the height of the fluid column VP is associated to conduit 13. This sensor 17 is in this case a pressure sensor arranged at the location 14 on arm 8 and actuated by the fluid pressure (fluid column) in conduit 13. The pressure sensor 17 is arranged on arm 8 at a distance S from hinge 10. It is of course a considerable advantage that the pressure sensor is not arranged on the digging bucket 11 or in the vicinity of hinge 10 where all measures increasing the dimensions should be avoided.

In a digging machine having an under body and a housing rotatable relative to each other, it is advantageous if the fluid receptacle 16, which above the fluid level in the receptacle may communicate with the atmosphere or stand under constant vacuum or over pressure, is located aligned with the axis 3 of rotation or at least fairly close to said axis since the conditions of measurement on this way will be influenced unconsiderably or not at all by rotation of the machine housing about axis 3 in cases wherein under body 1 stands inclined on the ground.

It is now evident that raising and lowering of location 14 on arm 8 relative to location 15 on machine housing 2 will vary the height of fluid column VP and thereby the indication of pressure sensor 17, which suitably is of an electrical type so that its electrical output

signal may be used as a variable magnitude for checking the depth of the digging work. However, since the pressure sensor 17 is located on arm 8 at a distance from hinge 10, this magnitude alone is not sufficient for checking. The distance S is known as is the distance H1 but the vertical component of the distance S depends on the inclination of arm 8.

In addition to the pressure sensor 17, a second sensor 18 adapted to deliver an information as to the inclination of arm 8 is arranged on said arm. From the sensor 18, which also can be adapted to deliver an electrical output signal, an information as to the magnitude of the angle  $\alpha$  can be obtained. Knowing this angle and the distance S, it is now possible to calculate the missing vertical interval H2 between hinge 10 and sensor 17 according to ordinary trigonometric functions.

As is diagrammatically indicated in Fig. 1, the output signals from sensors 17 and 18 are via conductors 19 and 20 transmitted to a processing unit arranged in the machine housing 2 and adapted to process the output signals obtained from the sensors, so as to calculate a value on the difference in altitude between location 15 (fluid level in receptacle 16) and a specific portion of the digging implement, in practice the hinge 10 thereof. With other words, unit 21 is capable of calculating, on basis of the information from the inclination sensor 18, the difference in altitude H2, which subsequently is to be added to the height of the fluid column VP determined by pressure sensor 17.

The unit 21 includes an electronic digging depth indicator which in practice may be used as follows: When an excavation is to be made, the bucket 11 is first of all put with the back 22 thereof in level with a known starting or reference level. The depth indicator may be set to zero on this reference level. For the sake of simplicity, it is assumed that this reference level corresponds to the ground level M in Fig. 1. In the process of the digging operation, the operator may now check the digging depth by applying the back 22 of the bucket against the bottom of the excavation in accordance with Fig. 1. On the depth indicator, a value may now be read which corresponds to the depth H3 of the excavation since the indication of the altitude previously had been set to zero on reference level M. When the desired depth has been reached, the operator may again set the indicator to zero, whereafter the bottom portion in question of the excavation will form a reference level.

It is of course important to adjust the bucket 11 in the same way on setting of the reference level (setting to zero) and reading of differences relative to said reference level.

In Fig. 2 there is illustrated a working site, where excavations having varying bottom

levels are to be made with the digging machine. On working sites of this kind, normally building sites, there is often means for establishing a reference level N. Said means is

5 normally constituted by a laser 23 rotating in a horizontal plane.  
As appears from Fig. 2, a detector 24 sensitive for laser light or the like is arranged on arm 8. Detector 24 is in a manner diagrammatically indicated in Fig. 1 connected to processing unit 21 via an electrical line 25. After having located boom 4 and arm 8 in such positions that detector 24 is in reference level N, processing unit 21 is capable of  
10 calculating the difference in altitude H4 between the reference level and hinge 10 on basis of the inclination information from inclination sensor 18 and an information, which may be programmed into processing unit 21, as to the position of detector 24 on arm 8 and possibly add the height H1 of the bucket (adjustable from the machine cabin) thereto so that H5 can be obtained. If the position of the detector 24 on arm 8 coincides with the  
25 position of pressure sensor 17 on said arm (which is the preferred embodiment although it has not been illustrated for the sake of clarity) it is now sufficient to store, in a suitable memory, an information as to the output signal of the pressure sensor when the detector 24 is in the level N so as to be able to calculate the level of hinge 10 or the back 22 of the bucket relative to level N after movement of arm 8 and the bucket. If the  
35 back 22 of the bucket is e.g. lowered against the bottom level O, processing unit 21 may calculate the height H6 by initially calculating the lowering of the detector and pressure sensor location by a comparison of the pressure sensor output signal in question with the stored information, whereafter the height H2, which is calculated by means of the output signal of the inclination sensor 18, as well as the height H1 of the bucket are added to the  
45 amount of lowering. If H6-H1, i.e. the height between level N and hinge 10, is desired, the addition of H1 is avoided. In the manner described, the position of level O relative to reference level N may be determined in a simple way without need for the operator to call for assisting personell.

The invention may of course be modified in several ways within the scope of the appended claims. E.g. the expression "digging machine", includes any machine intended for  
55 digging or similar work, e.g. back hoe machines, wheel supported digging machines, dredging machinery and other floating or land based digging devices, in addition to the exemplified digging machine carried by bands.

#### CLAIMS

1. A device for checking the depth  
65 reached by operation of a digging machine

including a digging implement (11) arranged on an arm (8) pivotably supported relative to the machine, said device comprising a fluid-filled conduit (13) associated with the arm and extending between a location (14) thereon and a location (15) on the machine separated from the arm (8), said conduit being associated with a sensor (17) for delivering an information corresponding to the height of the fluid column (VP) between said locations (14, 15), characterized by a second sensor (18) for delivering an information as to the inclination of the arm (8).

2. A device according to claim 1, characterized in that the first mentioned sensor (17) is a pressure sensor provided on said location (14) on the arm (8) and actuated by the fluid pressure in the conduit (13).

3. A device according to claim 2, characterized in that the pressure sensor (17) is arranged on the arm spaced from a hinge (10) connecting the digging implement (11) to the arm (8).

4. A device according to any preceding claim, characterized in that a processing unit (21) is adapted to automatically process information received from the sensors (17, 18) and calculate a value as to the difference in altitude between said location (15) on the machine or a set reference level and a specific portion (e.g. hinge 10 or back 22) of the digging implement (11) or the arm (8).

5. A device according to any preceding claim, characterized in that a detector (24) sensitive for laser light or other rays, wave motions or other facilities defining a reference plane, level or line is arranged on the arm (8).

6. A device according to claim 5, characterized by a processing unit (21) which is adapted to automatically calculate the difference in altitude between the detector (24) and a specific portion (e.g. the hinge 10 or back 22) of the digging implement (11) or the arm (8).

7. A device according to claim 5, characterized in that the detector (24), the pressure sensor (17) and the inclination sensor (18) are disposed on the same location or level on the arm (8).

Printed for Her Majesty's Stationery Office  
by Burgess & Son (Abingdon) Ltd.—1983.  
Published at The Patent Office, 25 Southampton Buildings,  
London, WC2A 1AY, from which copies may be obtained.